

## Style VII

The fluted Victorian pole features turn of the century design reminiscent of the gaslight era that complements traditional and contemporary styles. The slightly tapered shaft incorporates aesthetic and architectural essence to this refined Victorian VII pole.

Ameron's Traditional Series spun-cast, prestressed concrete lighting poles combine the charm of yesterday with today's technology. Available in a variety of configurations, colors and finishes, these poles provide architects and designers many creative options. All Ameron spun-cast concrete poles have our exclusive ten-year warranty. Durability with a classic touch.

### **General Information**

Ameron's Traditional Series poles are available in a variety of standard and custom configurations. Constructed with the highest quality prestressed concrete, these centrifugally cast, low-maintenance poles are strong, durable, and vibration resistant. Ameron poles conform to applicable sections of ACI, AASHTO, ASTM and UBC standards.



### **Surface Treatment**

The concrete shafts are lightly blasted to expose the texture and beauty of the natural aggregates while maintaining sharp definition of details and patterns.

### **Colors and Finishes**

Standard, pre-formulated and custom aggregate colors are available. See separate aggregate sheet for details. Ameron offers Amershield™, a premium graffiti-resistant coating, plus an assortment of durable sealers and protectants that further enhance colors, protect the concrete surface and aid in the removal of graffiti.



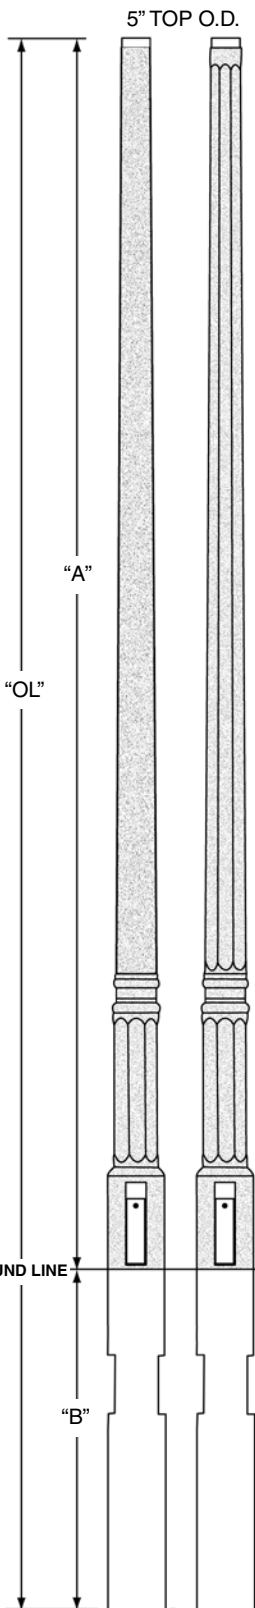


**BASE PLATE STYLE - INFORMATION**

CATALOG NUMBER	POLE HEIGHT "A"	BASE O.D.	ANCHOR BOLT	BOLT CIRCLE	BASE PLATE (SQ)	ULTIMATE G.L. MOMENT (FT. LBS.)	WEIGHT (LBS.)	MAXIMUM EPA/MPH (SQ FT)*		
								80	90	100
VBG-3.2	10'-4"	9"	3/4" x 24" x 4"	11-1/2"	11"	15,000	300	15.0	12.5	11.0
VBG-3.8	12'-4"	9"	3/4" x 24" x 4"	11-1/2"	11"	15,000	330	15.0	12.5	11.0
VBG-5.0	16'-4"	9"	3/4" x 24" x 4"	11-1/2"	11"	15,000	450	15.0	12.5	11.0
VBGR-5**	16'-4"	9"	3/4" x 24" x 4"	11-1/2"	11"	15,000	410	15.0	12.5	11.0
VBGR-6**	19'-7"	9"	1" x 36" x 4"	11-1/2"	11"	15,000	650	15.0	12.5	11.0
VBGR-7.5**	24'-7"	9"	1" x 36" x 4"	11-1/2"	11"	15,000	850	15.0	12.5	11.0
VBGR-9**	29'-6"	9"	1" x 36" x 4"	11-1/2"	11"	15,000	1050	15.0	12.5	11.0
VBGX-9**	29'-6"	9"	1" x 36" x 4"	11-1/2"	11"	15,000	1100	15.0	12.5	11.0

**EMBEDDED STYLE - INFORMATION**

CATALOG NUMBER	POLE HEIGHT "A"	BASE O.D.	EMBEDDED DEPTH "B"	OVERALL LENGTH "OL"	ULTIMATE G.L. MOMENT (FT. LBS.)	WEIGHT (LBS.)	MAXIMUM EPA/MPH (SQ FT)*		
							80	90	100
VEG-3.2	10'-4"	9"	4'-6"	14'-10"	15,000	490	15.0	12.5	11.0
VEG-3.8	12'-4"	9"	4'-6"	16'-10"	15,000	520	15.0	12.5	11.0
VEG-5.0	16'-4"	9"	4'-6"	20'-10"	15,000	700	15.0	12.5	11.0
VEGR-5**	16'-4"	9"	4'-6"	20'-10"	15,000	650	15.0	12.5	11.0
VEGR-6**	19'-7"	9"	5'-3"	24'-10"	15,000	750	15.0	12.5	11.0
VEGR7.5**	24'-7"	9"	5'-3"	29'-10"	15,000	1000	15.0	12.5	11.0
VEGR-9**	29'-6"	9"	5'-3"	34'-09"	15,000	1300	15.0	12.5	11.0
VEGX-9**	29'-6"	9"	5'-3"	34'-09"	15,000	1400	15.0	12.5	11.0

\*EPA based on post top mounting. Consult your representative for other attachment methods and increased load capacity requirements.  
\*\*VBGR and VEGR Pole - upper shaft section is round tapered, not fluted.

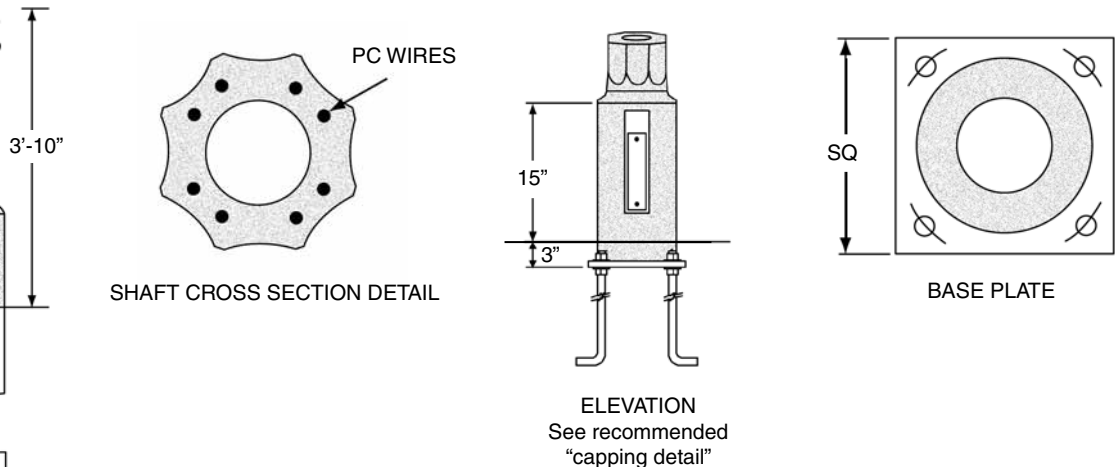

**Notes**

**SPECIFICATIONS**  
Use Centrecon Specifications.

**COLORS & FINISHES**  
See Color Selection Guide.

**LUMINAIRE MOUNTING**  
See Technical-Mounting Options Section for more information.

**ANTI-GRAFFITI & SEALER**  
Optional Coatings available for added protection.